

# Configure Ubersmith for Single Sign-On


Configuring Ubersmith for single sign-on (SSO) enables administrators to manage users of Citrix ADC. Users can securely log on to Ubersmith by using the enterprise credentials.

## Prerequisite


Browser Requirements: Internet Explorer 11 and above

## To configure Ubersmith for SSO by using SAML:


1. In a browser, type <https://<customer domain>.trial.ubersmith.com/> and press **Enter**.
2. Type your Ubersmith admin account credentials (**Username** and **Password**) and click **Log in**.

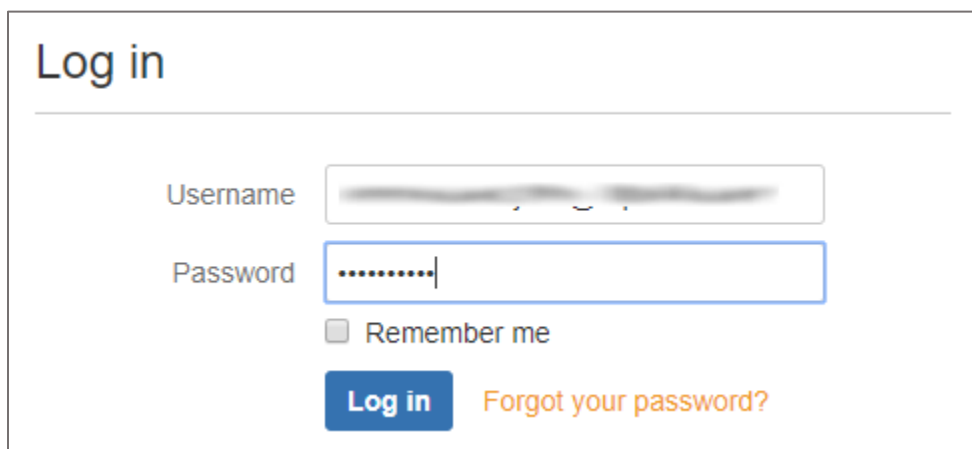

3. In the dashboard page, click **User Authentication** in the left pane.

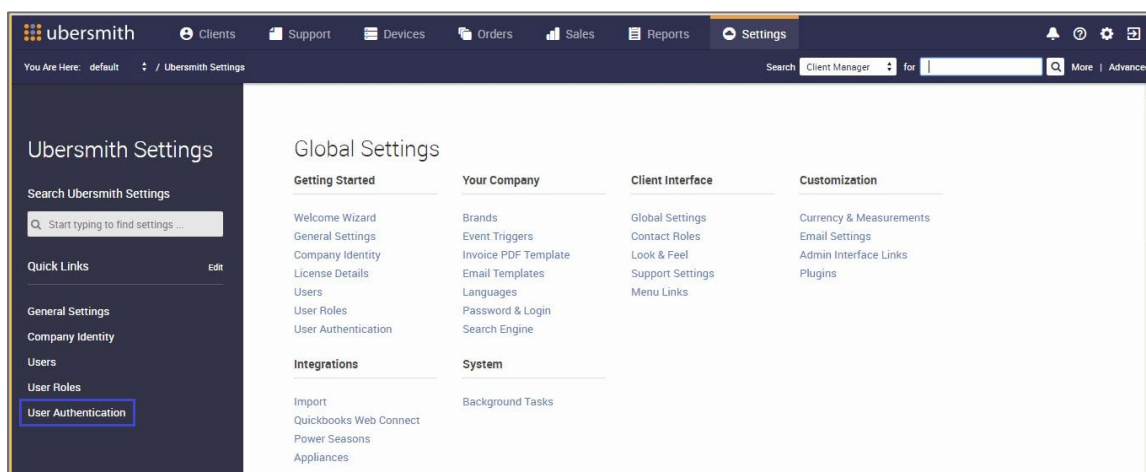


- In the **Authentication Settings** page, click **Add New Authentication Module** under **Authentication Modules**.

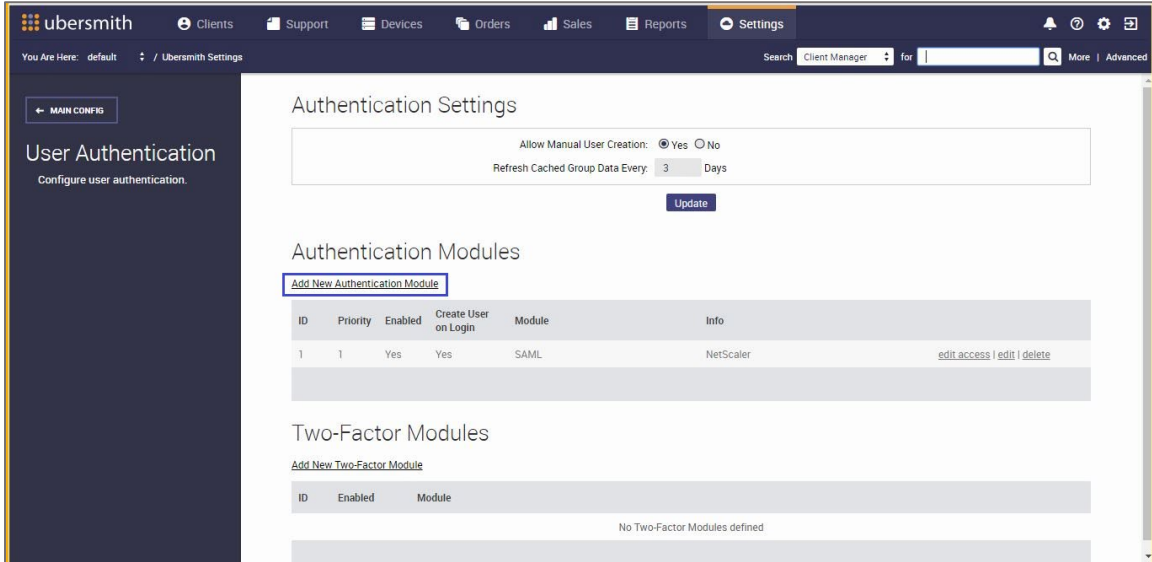


- In the **Edit Authentication Module: SAML** page, click the **Details** tab and enter the values for the following fields:

Required Information	Description
Enabled	Select the <b>Yes</b> radio button.
Module	Select <b>SAML</b> from the drop-down list.
Priority	1
Create User on Login	Select the check box.

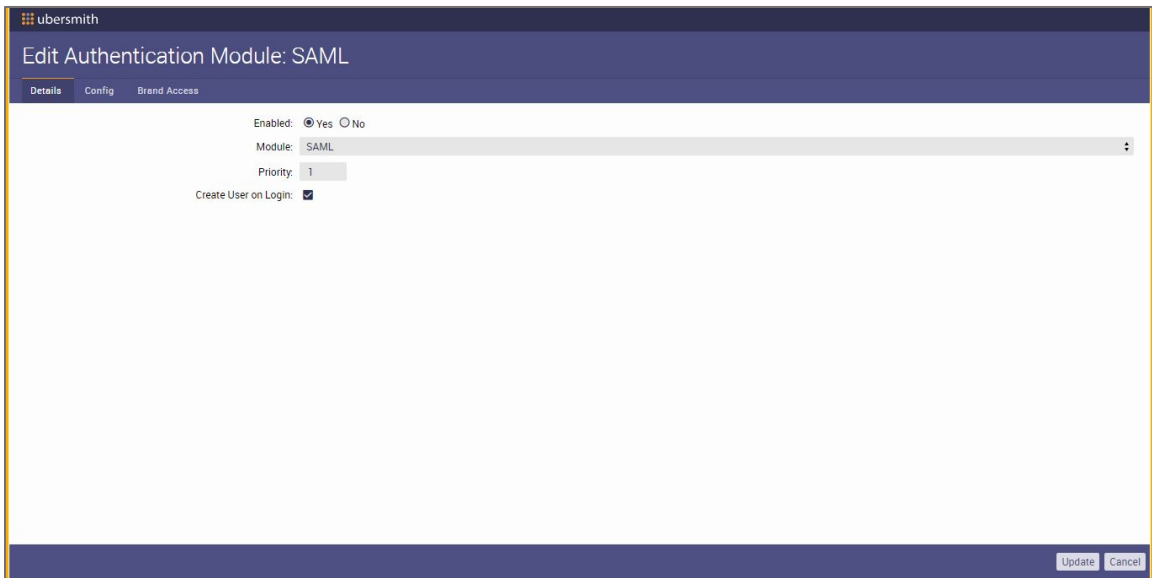

6. Click the **Config** tab and enter the values for the following fields:

Required Information	Description
ID Provider (IdP)*	IdP URL
IdP Name*	NetScaler
IdP Signon URL*	IdP logon URL
IdP Logout URL*	IdP logout URL
IdP x509 Certificate*	<p>Copy and paste the IdP certificate. The IdP certificate must begin and end with            - - - - -Begin Certificate- - - - - and - - - - -End Certificate- - - - -</p> <p><b>Note:</b> The IdP metadata is provided by Citrix and can be accessed from the link below. The link is displayed while configuring SSO settings for your app.  <a href="https://gateway.cloud.com/idp/saml/&lt;citrixcloudcust_id&gt;/&lt;app_id&gt;/idp_metadata.xml">https://gateway.cloud.com/idp/saml/&lt;citrixcloudcust_id&gt;/&lt;app_id&gt;/idp_metadata.xml</a></p>
Ubersmith "Login Name" Attribute Name*	email
Service Provider (SP) Entity ID*	Issuer URL

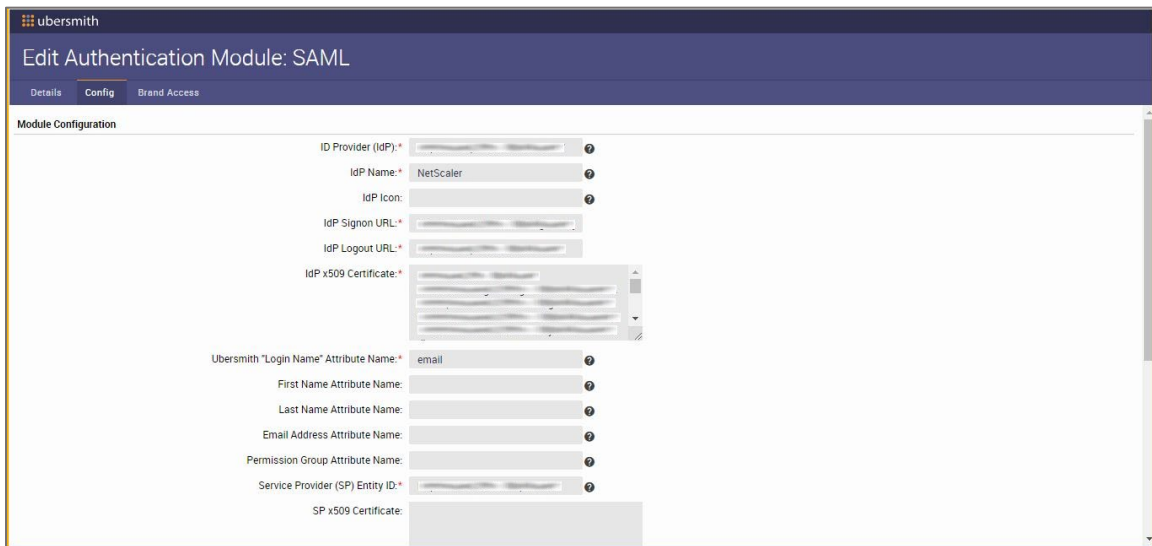

7. Click the **Brand Access** tab and enter the values for the following fields:

Required Information	Description
Full Brand Access?	Select the <b>Yes</b> radio button.

The screenshot shows the 'Edit Authentication Module: SAML' configuration page. The 'Brand Access' tab is selected. The 'Full Brand Access?' radio button is set to 'Yes'. Below this, there is a table with two columns: 'Brand' and 'Access?'. The 'Brand' column has two rows: 'default:' and 'Brand Two:'. The 'Access?' column has two rows, both with checked checkboxes.

Brand	Access?
default:	<input checked="" type="checkbox"/>
Brand Two:	<input checked="" type="checkbox"/>

At the bottom right of the page, there are 'Update' and 'Cancel' buttons.

8. Finally, click **Update**.